






Installation instructions

i 3D Adjustable Concealed Hinge 135X28mm Zinc Alloy

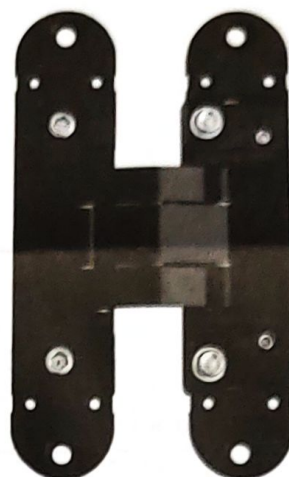

Upgraded mute polyformaldehyde gasket

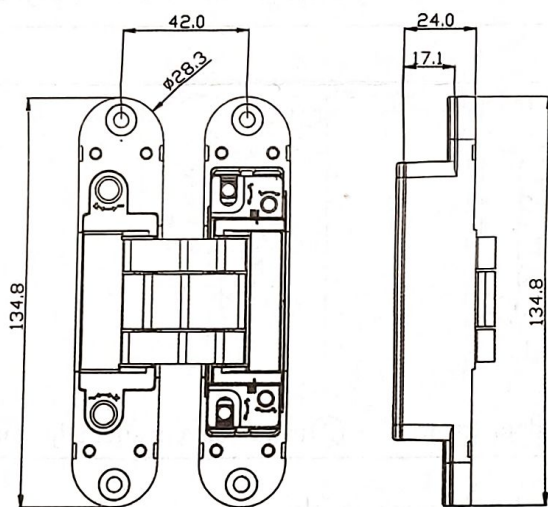


***8pcs Upgraded mute polyformaldehyde gaskets, make open and close more smoothly and mutely**

• Max door weight :	60kg (bearingweight of 2 hinges)
• Max opening angle :	≤180°
• Max door width :	≤940mm
• Max door height :	≤2286mm
• Min door thickness :	35~50mm
• Adjustment function :	Vertical±2.5mm, horizontal± 1.5mm, depth± 1.0mm

Package: 2pcs hinges, accessory screws & tools, Installation Instruction



1




Hole dimension of door leaf & door frame

Remarks: the corners of door leaf and door frame with highlight of "A" need C1 or R1 process.

Step 1: As the picture ①, use cross screwdriver to install the concealed door hinge into door leaf hole with screws tightly.

Step 2: As the picture ②, use cross screwdriver to install the door leaf with concealed door hinge into door frame hole with screws tightly.

Step 3: Overall check to ensure that all parts are installed tightly after installment and adjustment.

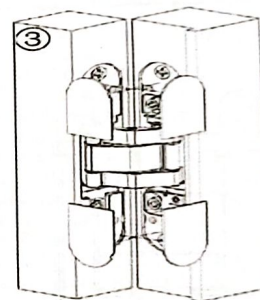

① Install on door leaf

② Install on door frame

③ Install covers after adjustment

Step 4: Open and close for several times to check that it work safely

Adjustment :

Up&Down: $\pm 2.5\text{mm}$

Left&Right: $\pm 1.5\text{mm}$

In&Out: $\pm 1.0\text{mm}$

